

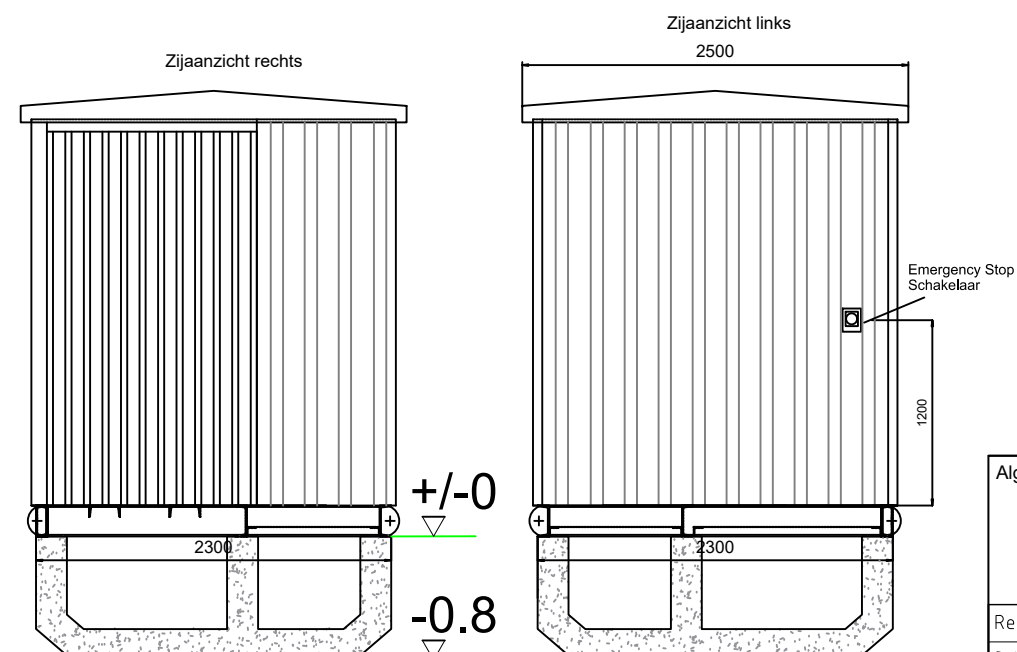
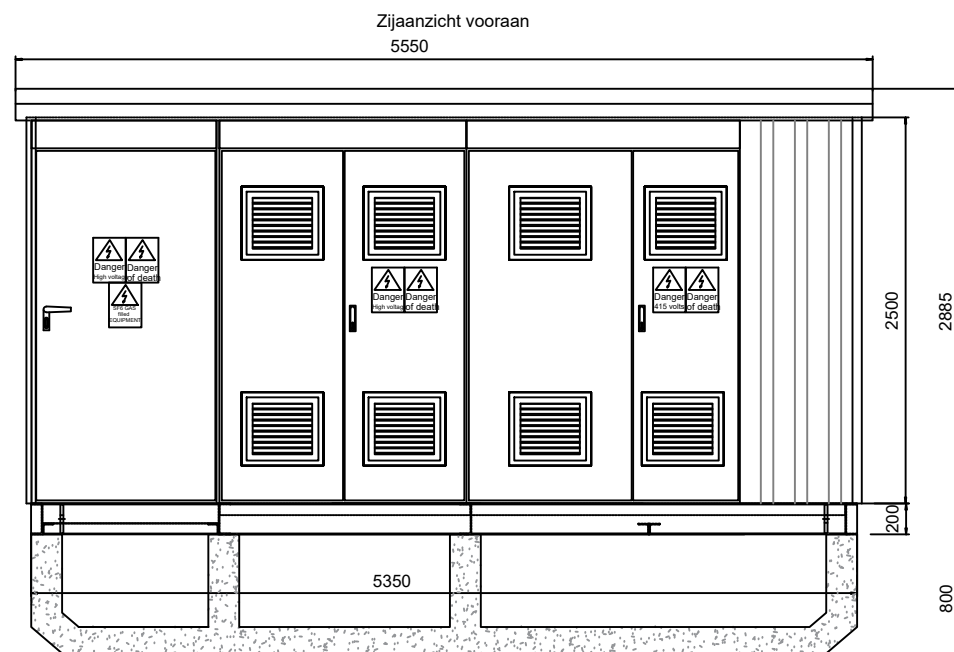
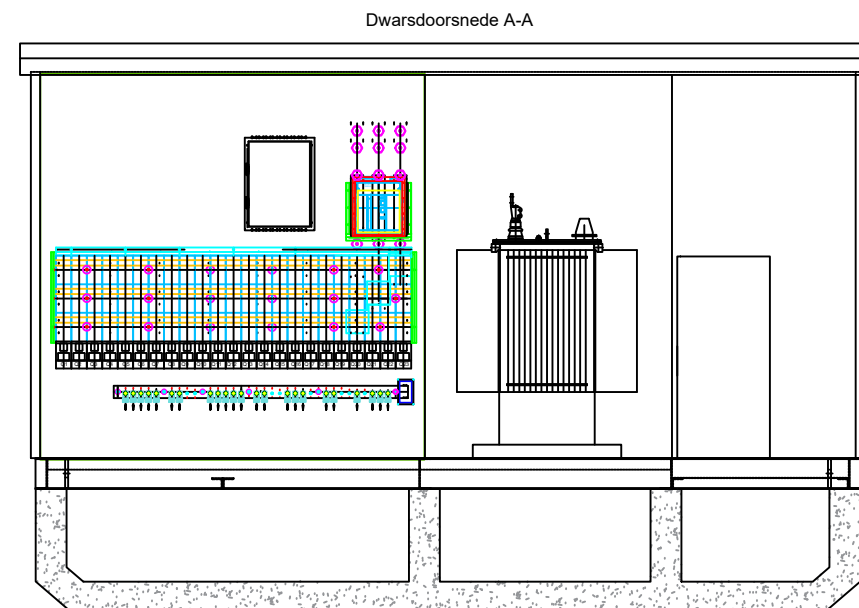
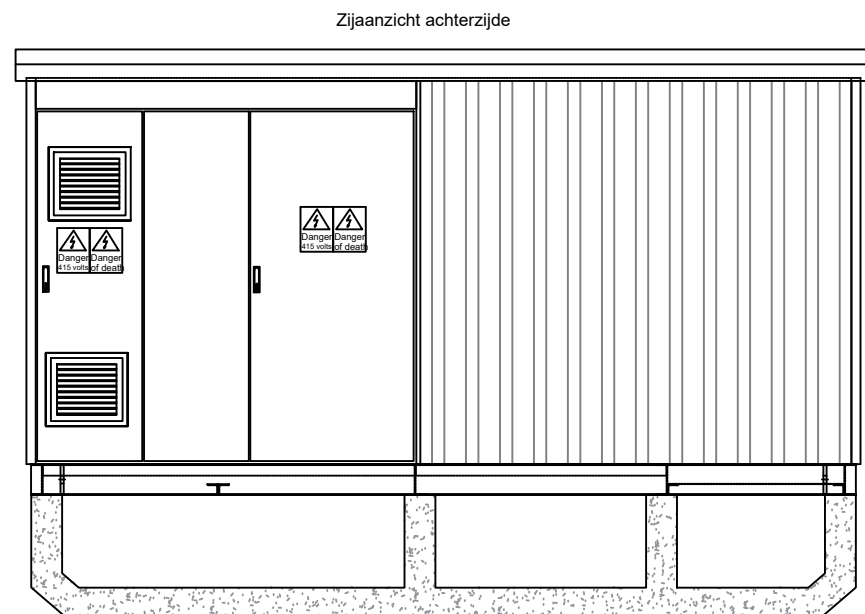
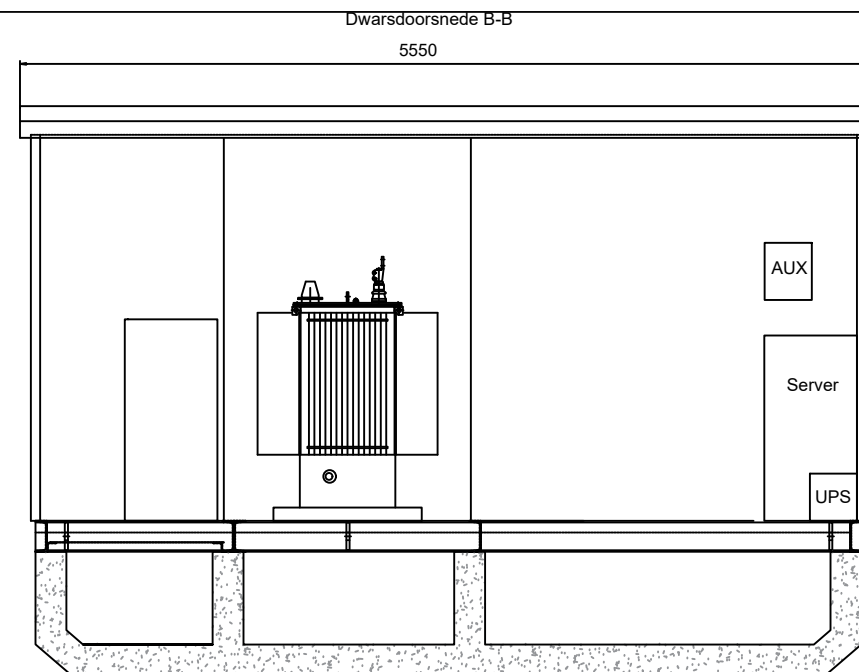


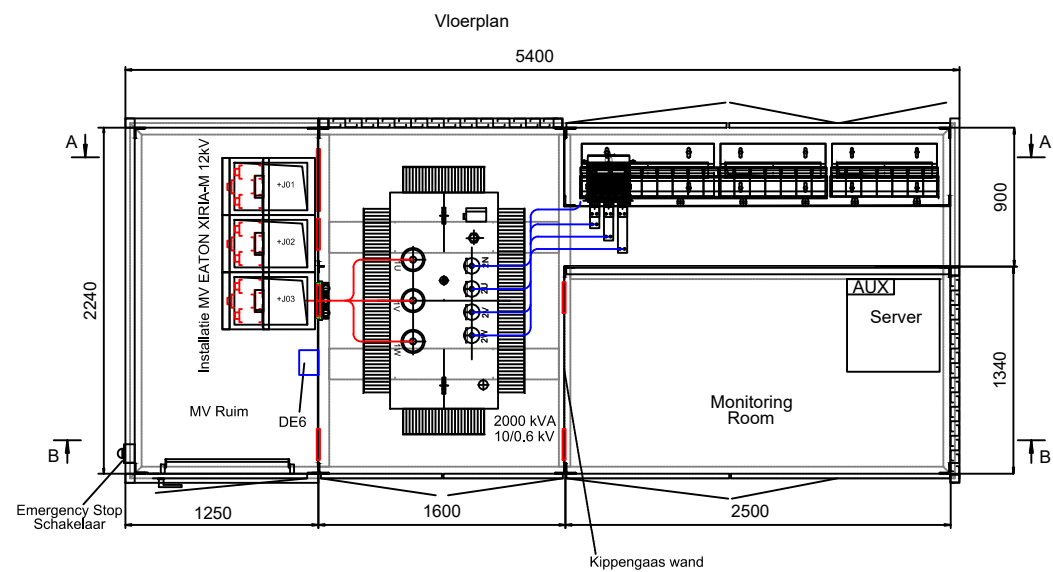


Algemeen aannemer:		Addres: VARTEC B.V. Krajenhoffstraat 137-A Amsterdam 1018RG The Netherlands Telefoon:0031(0)638342809 Fax:	
Revisie:	01	Project:	
Schaal:	-	Eenheid:mm	Vlagtwedde
Datum	17.12.2019	Tekening:	Transformator station
trekken	herzien		

Zijaanzicht breedte




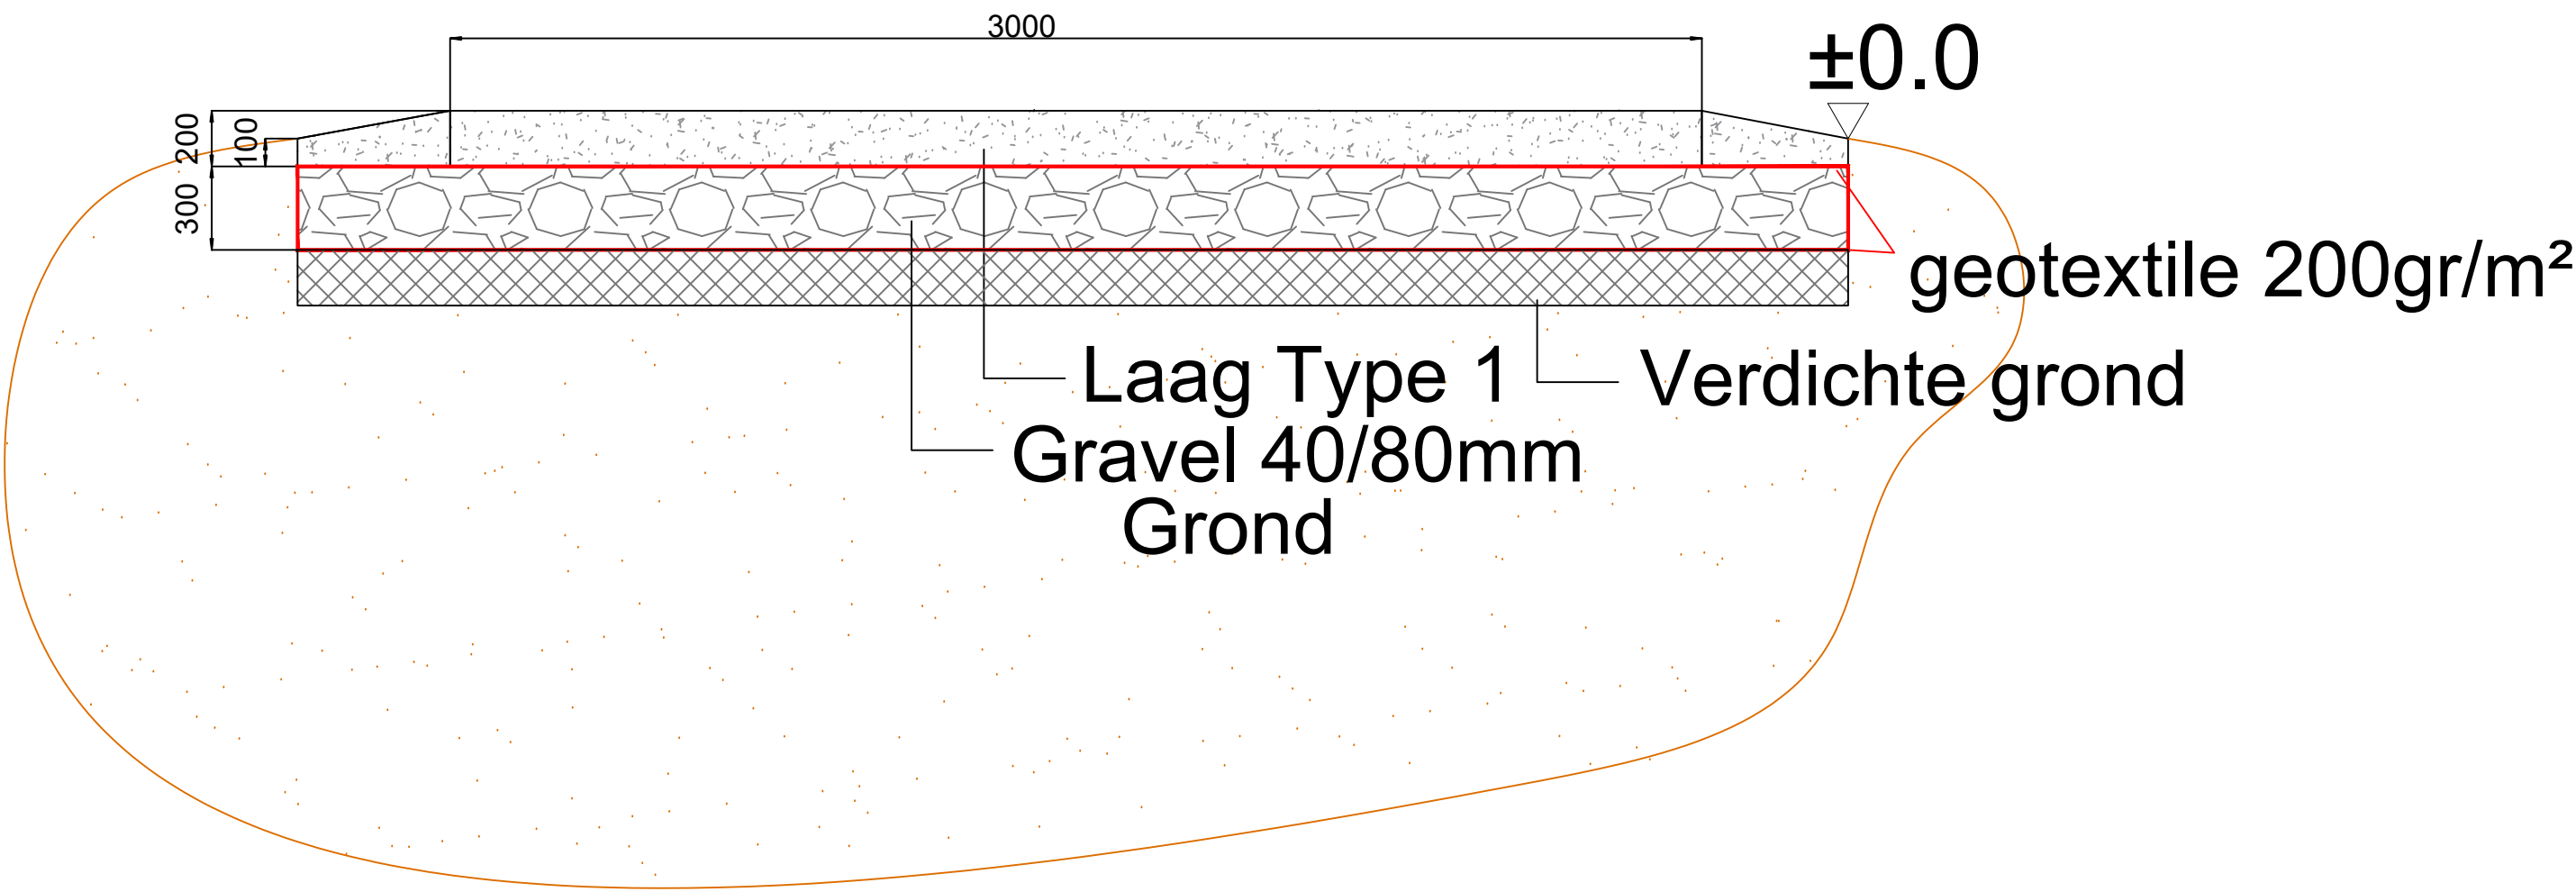


Ontwerp, uitvoering en controle wegen met een minimum breedte van 3m die geschikt zijn voor minimaal 16 tons per as.
Controle van de draagkracht van de weg door testen overeenkomstig de Nederlandse Draagkracht methode of gelijkwaardig.
Aanleg van de weg met DNO vereisten en specificaties als de weg naar het DNO substation gaan.

Algemeen aannemer:		Address: VARTEC B.V. Krajenhoffstraat 137-A Amsterdam 1018RG The Netherlands Telefoon:0031(0)638342809 Fax:	
Revisie:	01	Project:	
Schaal:	-	Eenheid:mm	Vlagtwedde
Datum	17.12.2019	Tekening:	Straat
trekken	herzien		

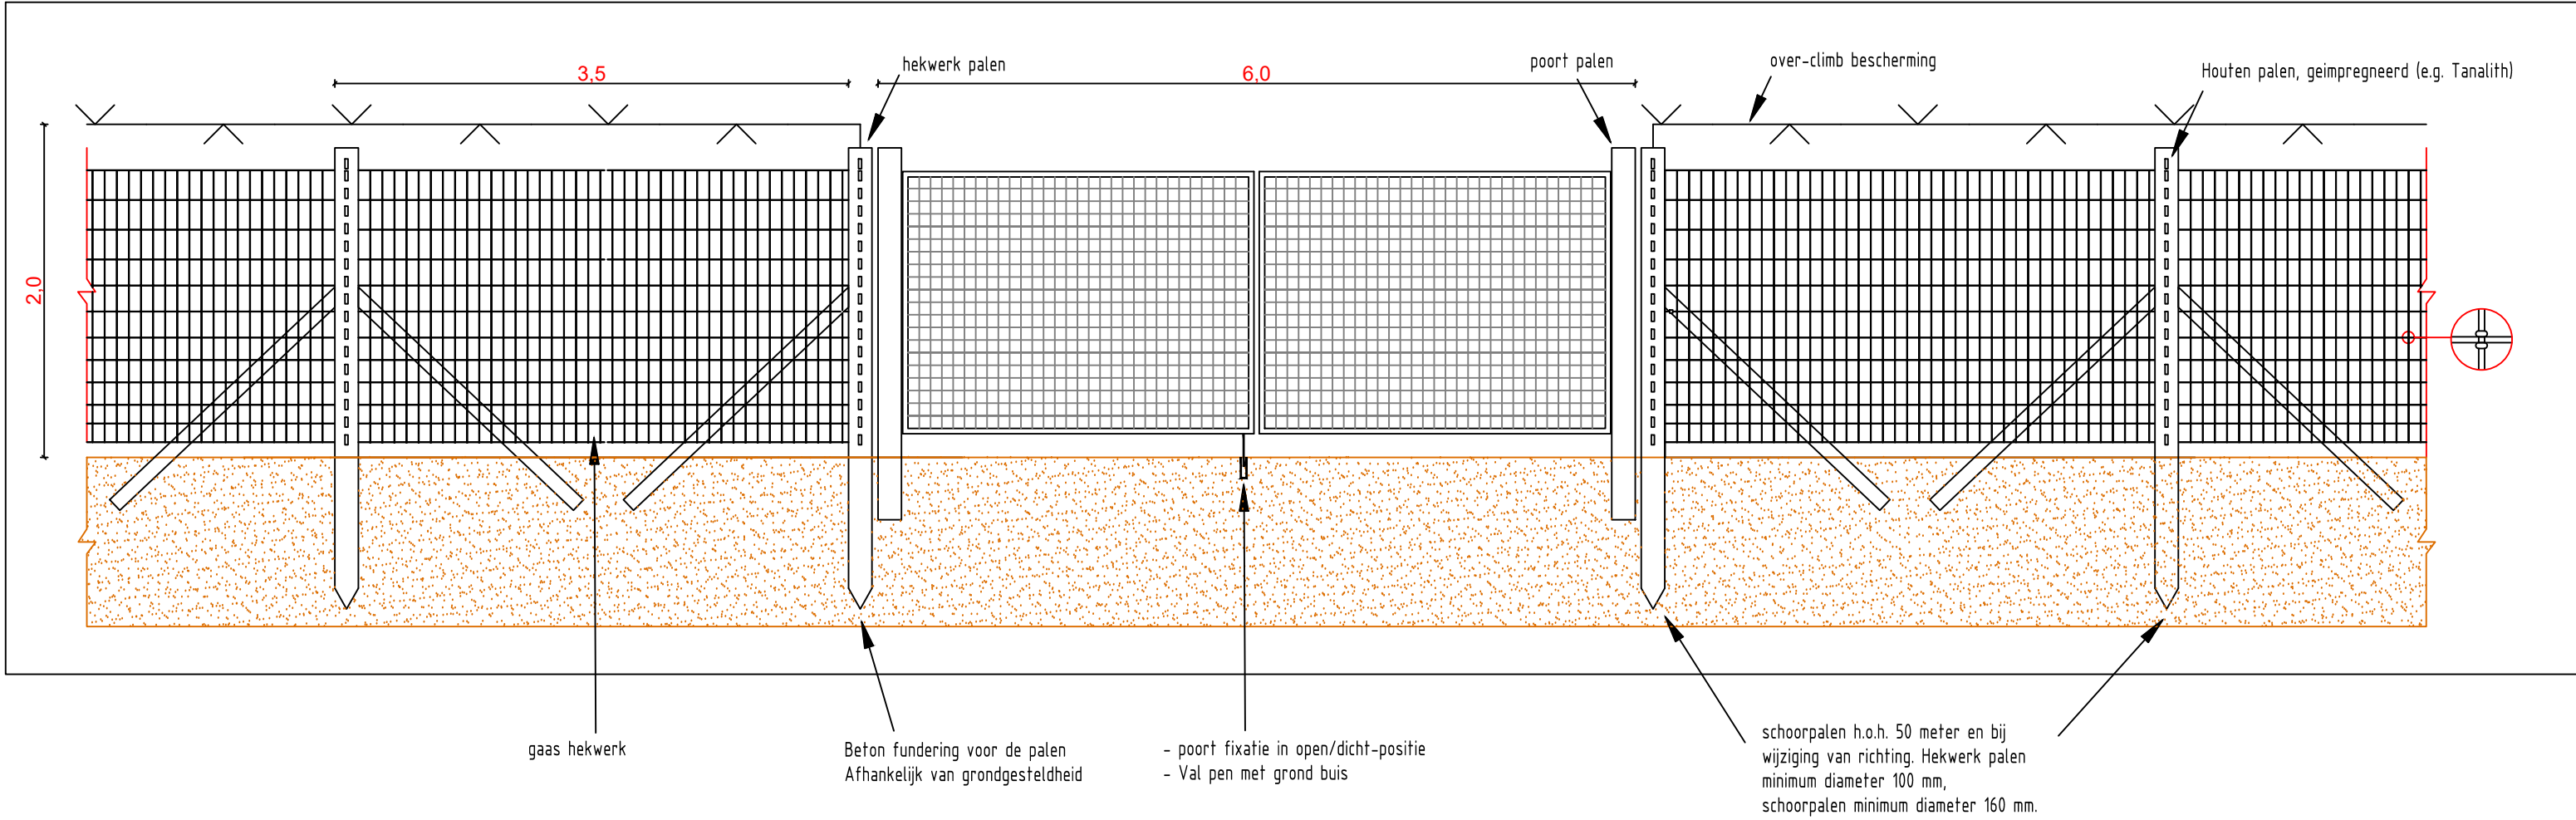


Algemeen aannemer:		Address: VARTEC B.V. Krajenhoffstraat 137-A Amsterdam 1018RG The Netherlands Telefoon:0031(0)638342809 Fax:	
Revisie:	01	Project:	
Schaal:	-	Eenheid:mm	Vlagtwedde
Datum	Voorbereid door	Tekening:	
trekken	17.12.2019	Hek	
herzien			

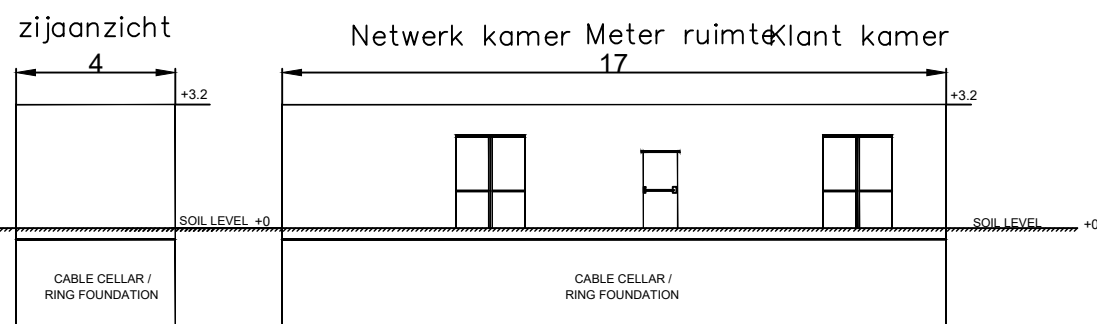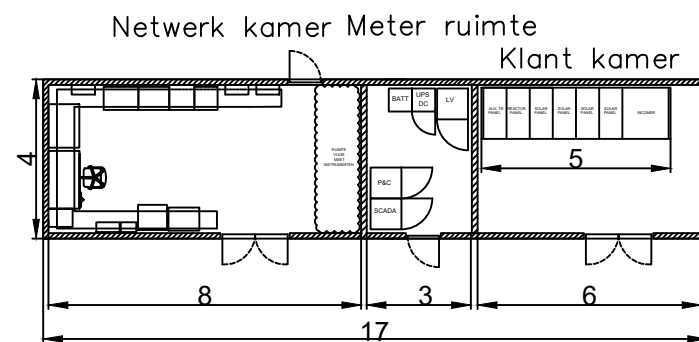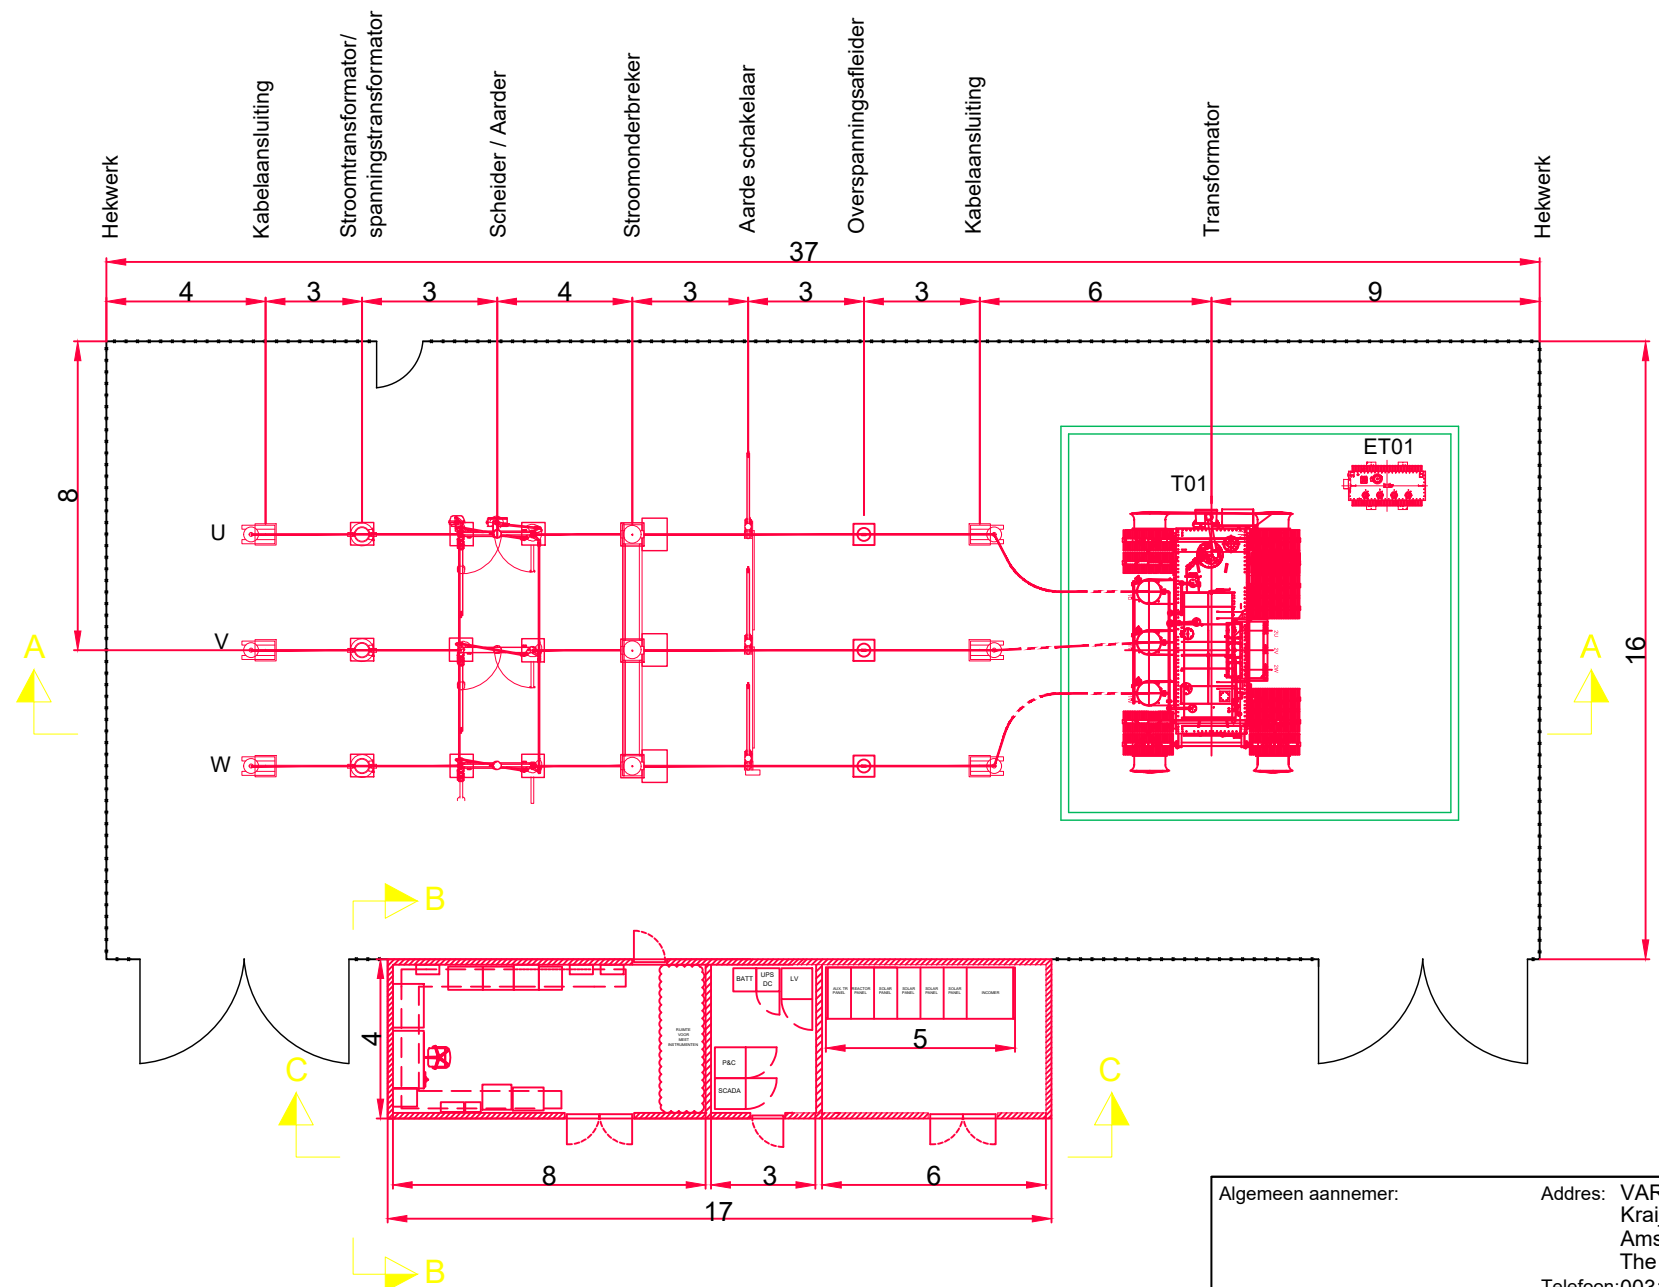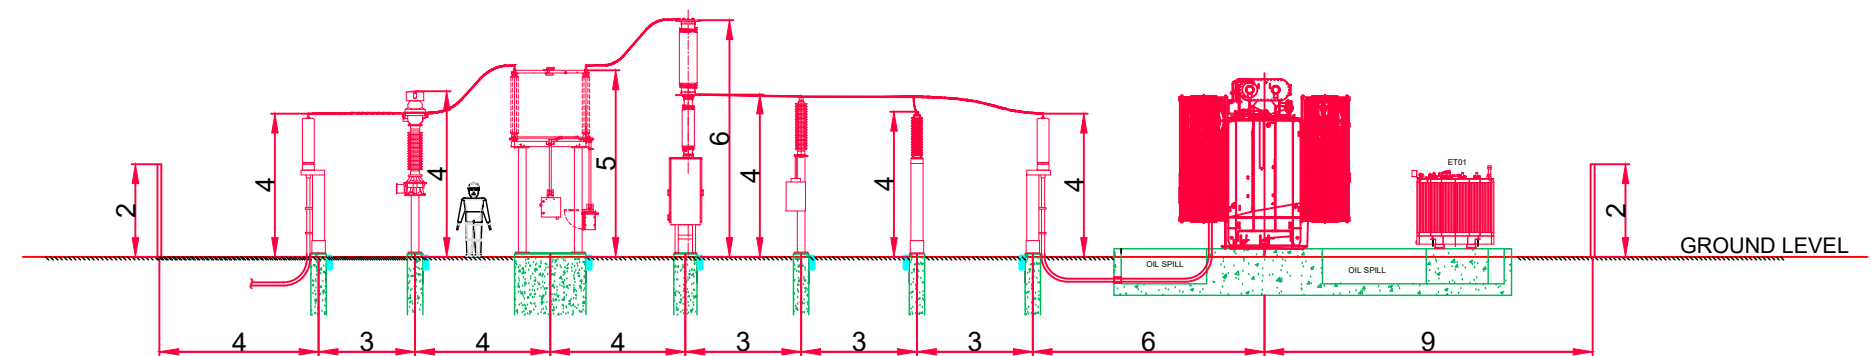


Materiaal	Staal
Kleur	Grijs (RAL 7004)

Alle units zijn in m


Algemeen aannemer:		Address: VARTEC B.V. Krajenhoffstraat 137-A Amsterdam 1018RG The Netherlands Telefoon: 0031(0)638342809 Fax:	
Revisie:	01	Project:	
Schaal:	1:200	Eenheid:	mm
Datum	17.12.2019	Tekening:	
trekken	herzien	Klantstation	

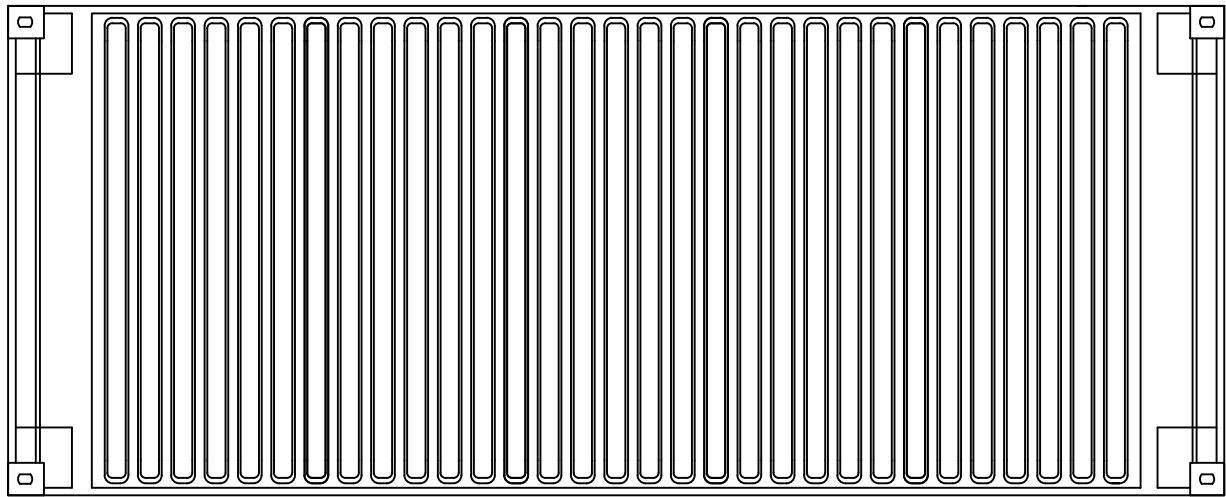


Bovenaanzicht

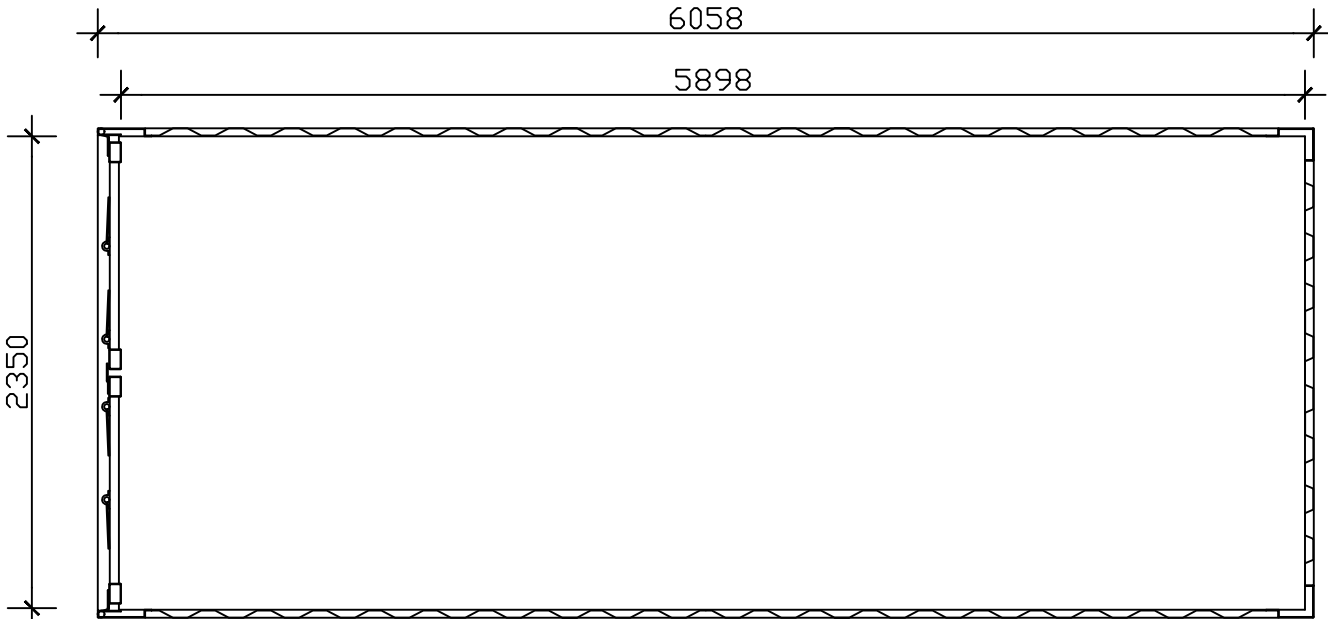


Vloerplan

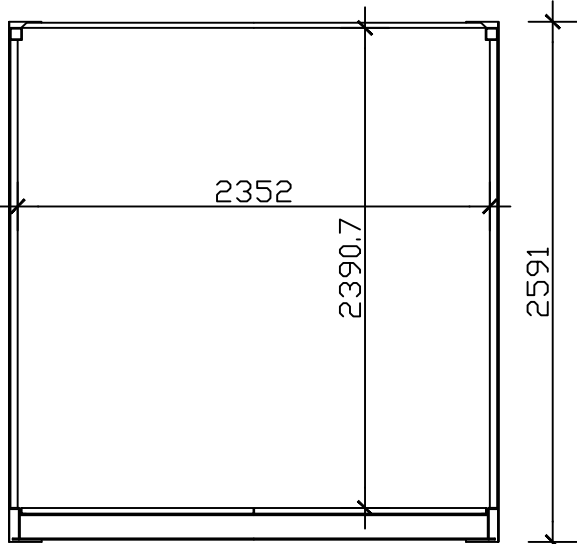


Dwarsdoorsnede

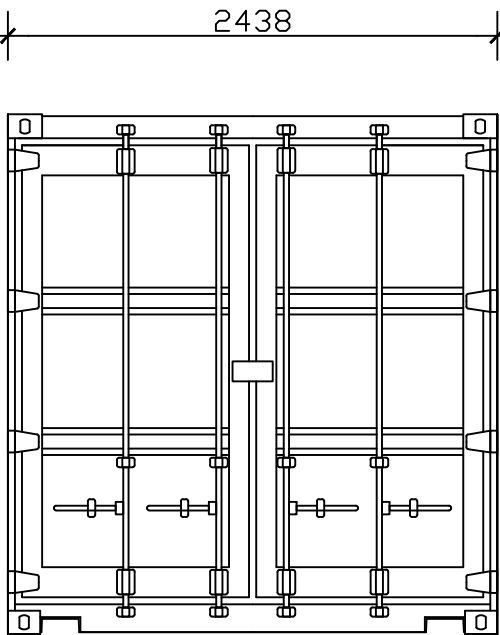

Zijaanzicht vooraan

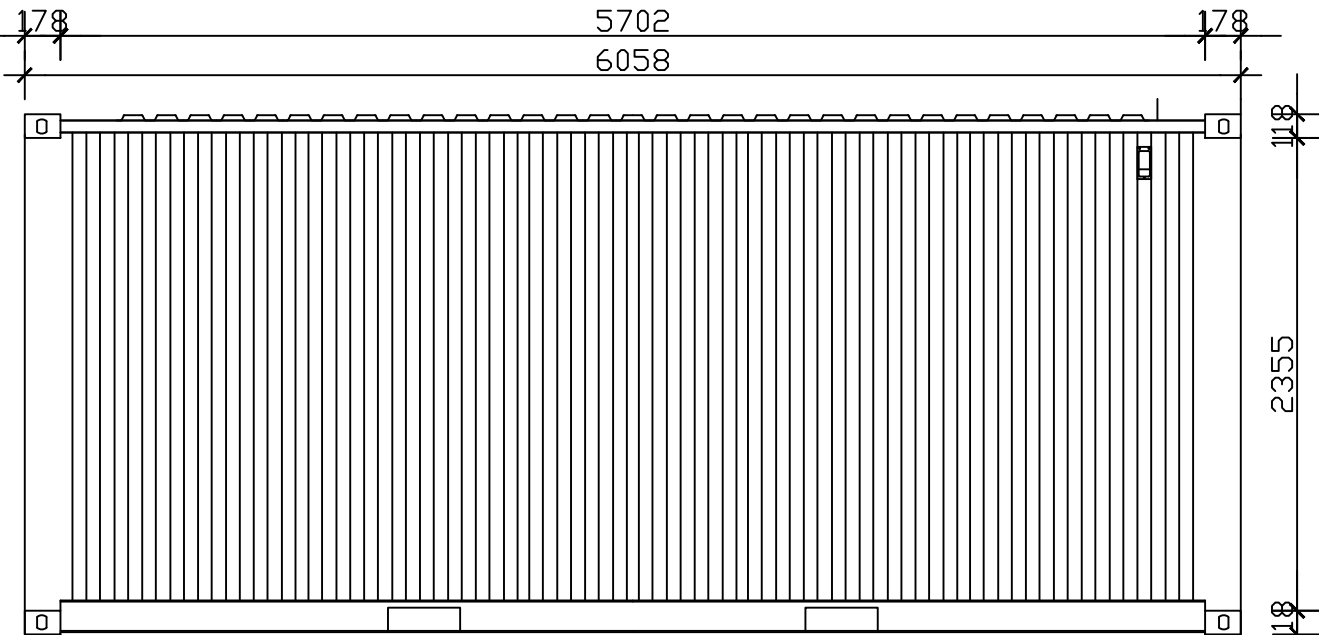

Zijaanzicht links

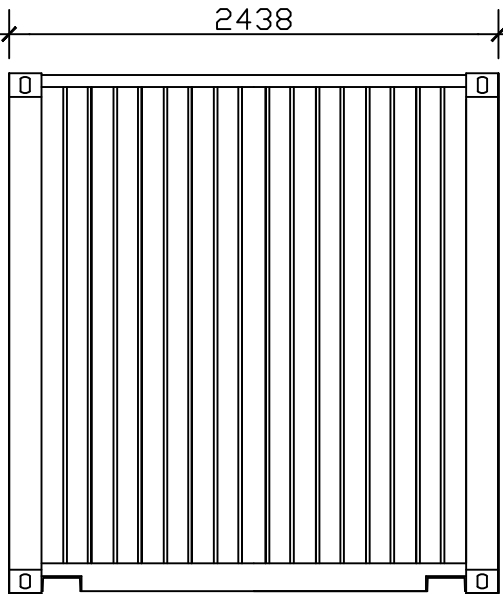

Zijaanzicht achterzijde

Algemeen aannemer:		Addres: VARTEC B.V. Kraijenhoffstraat 137-A Amsterdam 1018RG The Netherlands Telefoon:0031(0)638342809 Fax: -	
Revisie:	01	Project: Vlagtwedde	
Schaal:	-	Eenheid:mm	
Datum	17.12.2019	Vorbereid door	Tekening:
trekken	herzien		Opslag container




KuPower

HIGH EFFICIENCY MONO PERC MODULE

CS3K-315 | 320 | 325 | 330MS

(1000 V / 1500 V)

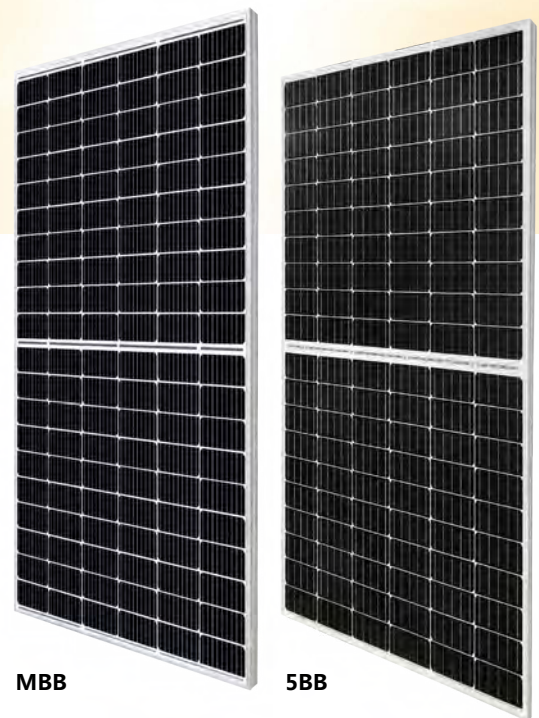

MBB

5BB

*Black frame product can be provided upon request.

MORE POWER



Low power loss in cell connection



Low NMOT: 41 ± 3 °C
Low temperature coefficient (Pmax): -0.37 % / °C



Better shading tolerance



High PTC rating of up to: 93.11 %

MORE RELIABLE



Lower hot spot temperature



Minimizes micro-cracks



Heavy snow load up to 6000 Pa,
wind load up to 4000 Pa*



linear power output warranty



product warranty on materials
and workmanship

MANAGEMENT SYSTEM CERTIFICATES

ISO 9001:2015 / Quality management system
ISO 14001:2015 / Standards for environmental management system
OHSAS 18001:2007 / International standards for occupational health & safety

PRODUCT CERTIFICATES*

IEC 61215 / IEC 61730: VDE / CE / MCS / CEC AU
UL 1703 / IEC 61215 performance: CEC listed (US) / FSEC (US Florida)
UL 1703: CSA / IEC61701 ED2: VDE / IEC62716: VDE / IEC60068-2-68: SGS
Take-e-way



*We can provide this product with special BOM specifically certified with salt mist, ammonia and sand blowing tests. Please talk to our local technical sales representatives to get your customized solutions.

CANADIAN SOLAR INC. is committed to providing high quality solar products, solar system solutions and services to customers around the world. No. 1 module supplier for quality and performance/price ratio in IHS Module Customer Insight Survey. As a leading PV project developer and manufacturer of solar modules with over 30 GW deployed around the world since 2001.


* For detailed information, please refer to the Installation Manual.

CANADIAN SOLAR INC.


545 Speedvale Avenue West, Guelph, Ontario N1K 1E6, Canada, www.canadiansolar.com, support@canadiansolar.com

ENGINEERING DRAWING (mm)


Rear View

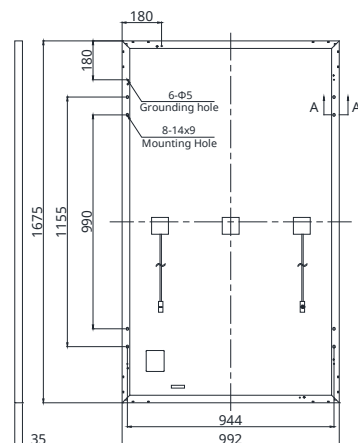


Frame Cross Section A-A



Mounting Hole



CS3K-315MS / I-V CURVES

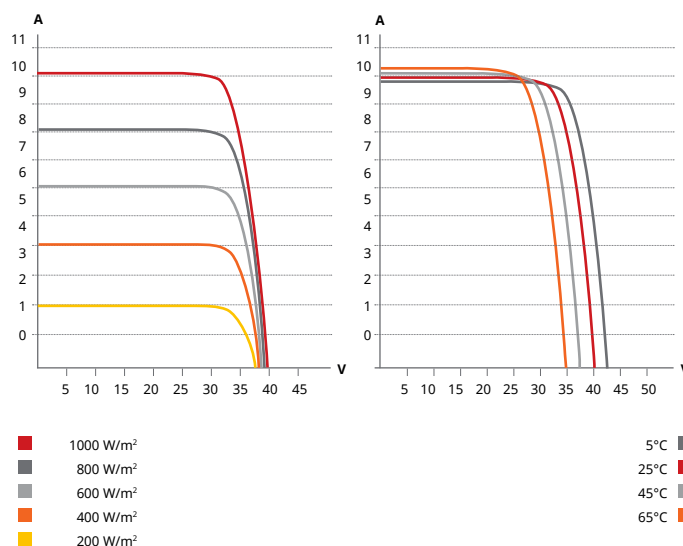

ELECTRICAL DATA | STC*

CS3K	315MS	320MS	325MS	330MS
Nominal Max. Power (Pmax)	315 W	320 W	325 W	330 W
Opt. Operating Voltage (Vmp)	33.1 V	33.3 V	33.5 V	33.7 V
Opt. Operating Current (Imp)	9.52 A	9.61 A	9.71 A	9.80 A
Open Circuit Voltage (Voc)	39.9 V	40.1 V	40.3 V	40.5 V
Short Circuit Current (Isc)	10.06 A	10.14 A	10.22 A	10.30 A
Module Efficiency	18.96%	19.26%	19.56%	19.86%
Operating Temperature	-40°C ~ +85°C			
Max. System Voltage	1500V (IEC/UL) or 1000V (IEC/UL)			
Module Fire Performance	TYPE 1 (UL 1703) or CLASS C (IEC 61730)			
Max. Series Fuse Rating	30 A			
Application Classification	Class A			
Power Tolerance	0 ~ + 5 W			

* Under Standard Test Conditions (STC) of irradiance of 1000 W/m², spectrum AM 1.5 and cell temperature of 25°C.

ELECTRICAL DATA | NMOT*

CS3K	315MS	320MS	325MS	330MS
Nominal Max. Power (Pmax)	235 W	239 W	243 W	246 W
Opt. Operating Voltage (Vmp)	30.7 V	30.9 V	31.1 V	31.3 V
Opt. Operating Current (Imp)	7.65 A	7.73 A	7.80 A	7.88 A
Open Circuit Voltage (Voc)	37.5 V	37.7 V	37.9 V	38.1 V
Short Circuit Current (Isc)	8.11 A	8.18 A	8.24 A	8.31 A

* Under Nominal Module Operating Temperature (NMOT), irradiance of 800 W/m², spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s.

MECHANICAL DATA

Specification	Data
Cell Type	Mono-crystalline
Cell Arrangement	120 [2 X (10 X 6)]
Dimensions	1675 X 992 X 35 mm (65.9 X 39.1 X 1.38 in)
Weight	18.5 kg (40.8 lbs)
Front Cover	3.2 mm tempered glass
Frame	Anodized aluminium alloy
J-Box	IP68, 3 bypass diodes
Cable	4.0 mm² (IEC), 12 AWG (UL),
Cable Length (Including Connector)	Portrait: 400 mm (15.7 in) (+) / 280 mm (11.0 in) (-); landscape: 1160 mm (45.7 in)*
Connector	T4 series
Per Pallet	30 pieces
Per Container (40' HQ)	840 pieces

* For detailed information, please contact your local Canadian Solar sales and technical representatives.

TEMPERATURE CHARACTERISTICS

Specification	Data
Temperature Coefficient (Pmax)	-0.37 % / °C
Temperature Coefficient (Voc)	-0.29 % / °C
Temperature Coefficient (Isc)	0.05 % / °C
Nominal Module Operating Temperature	41 ± 3°C



PARTNER SECTION



* The specifications and key features contained in this datasheet may deviate slightly from our actual products due to the on-going innovation and product enhancement. Canadian Solar Inc. reserves the right to make necessary adjustments to the information described herein at any time without further notice. Please be kindly advised that PV modules should be handled and installed by qualified people who have professional skills and please carefully read the safety and installation instructions before using our PV modules.

CANADIAN SOLAR INC.

545 Speedvale Avenue West, Guelph, Ontario N1K 1E6, Canada, www.canadiansolar.com, support@canadiansolar.com

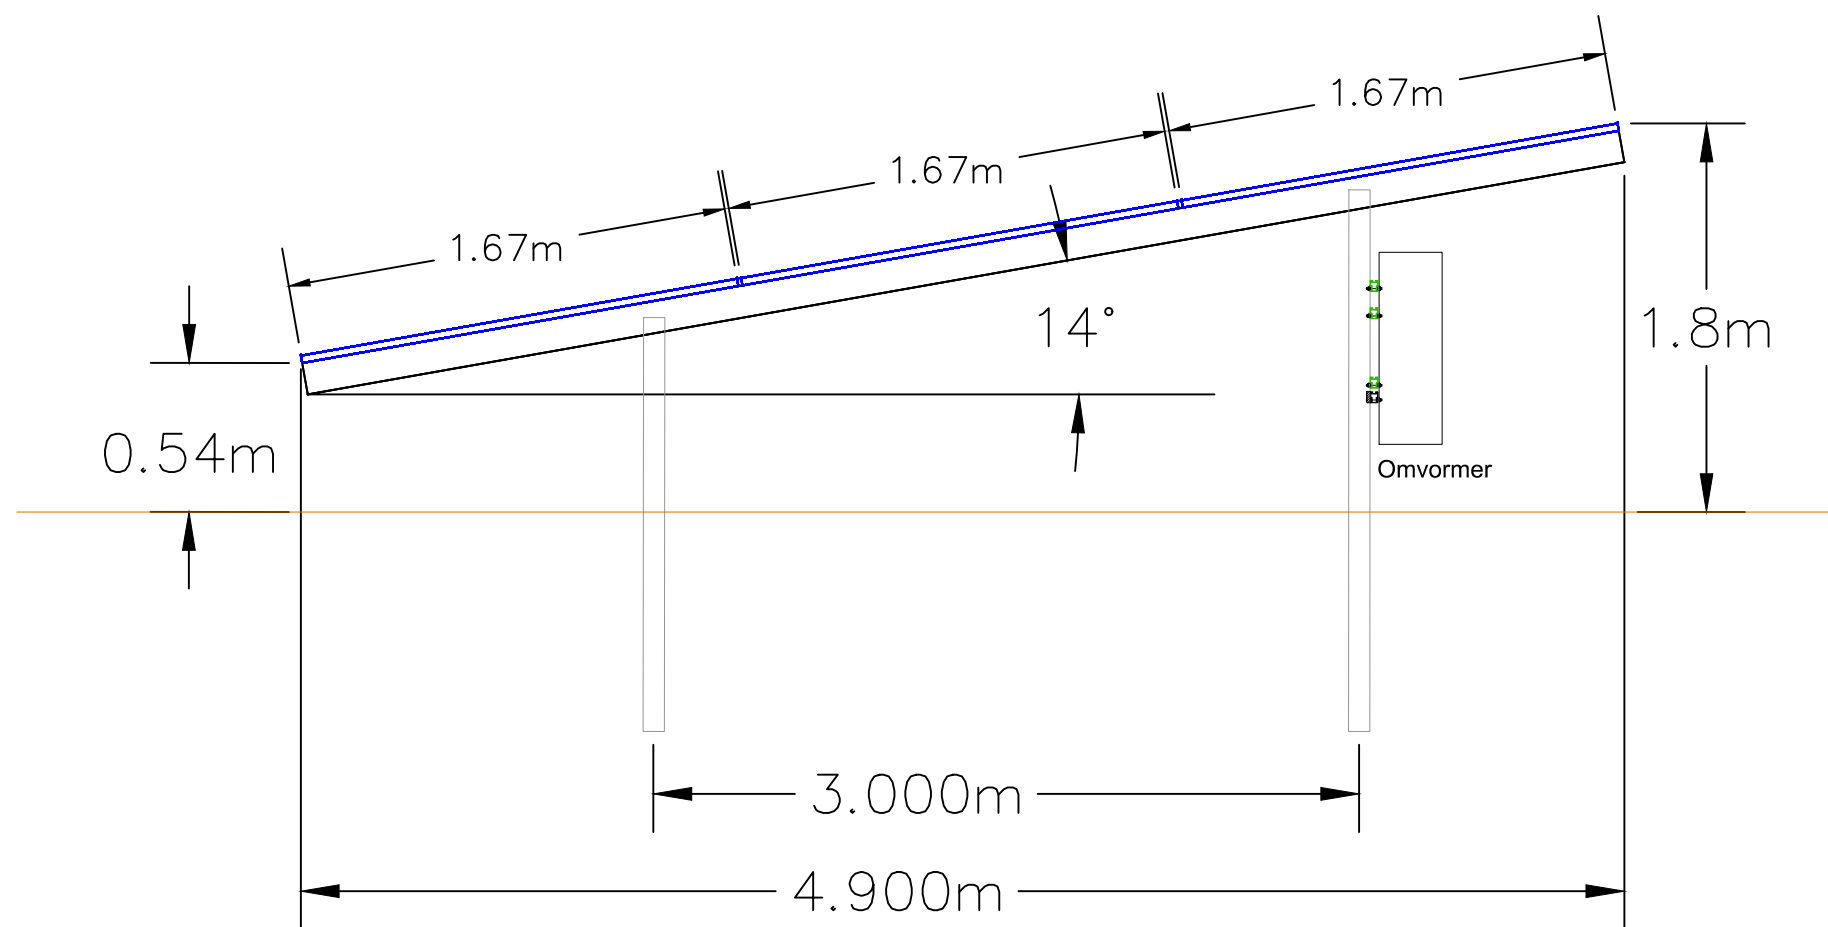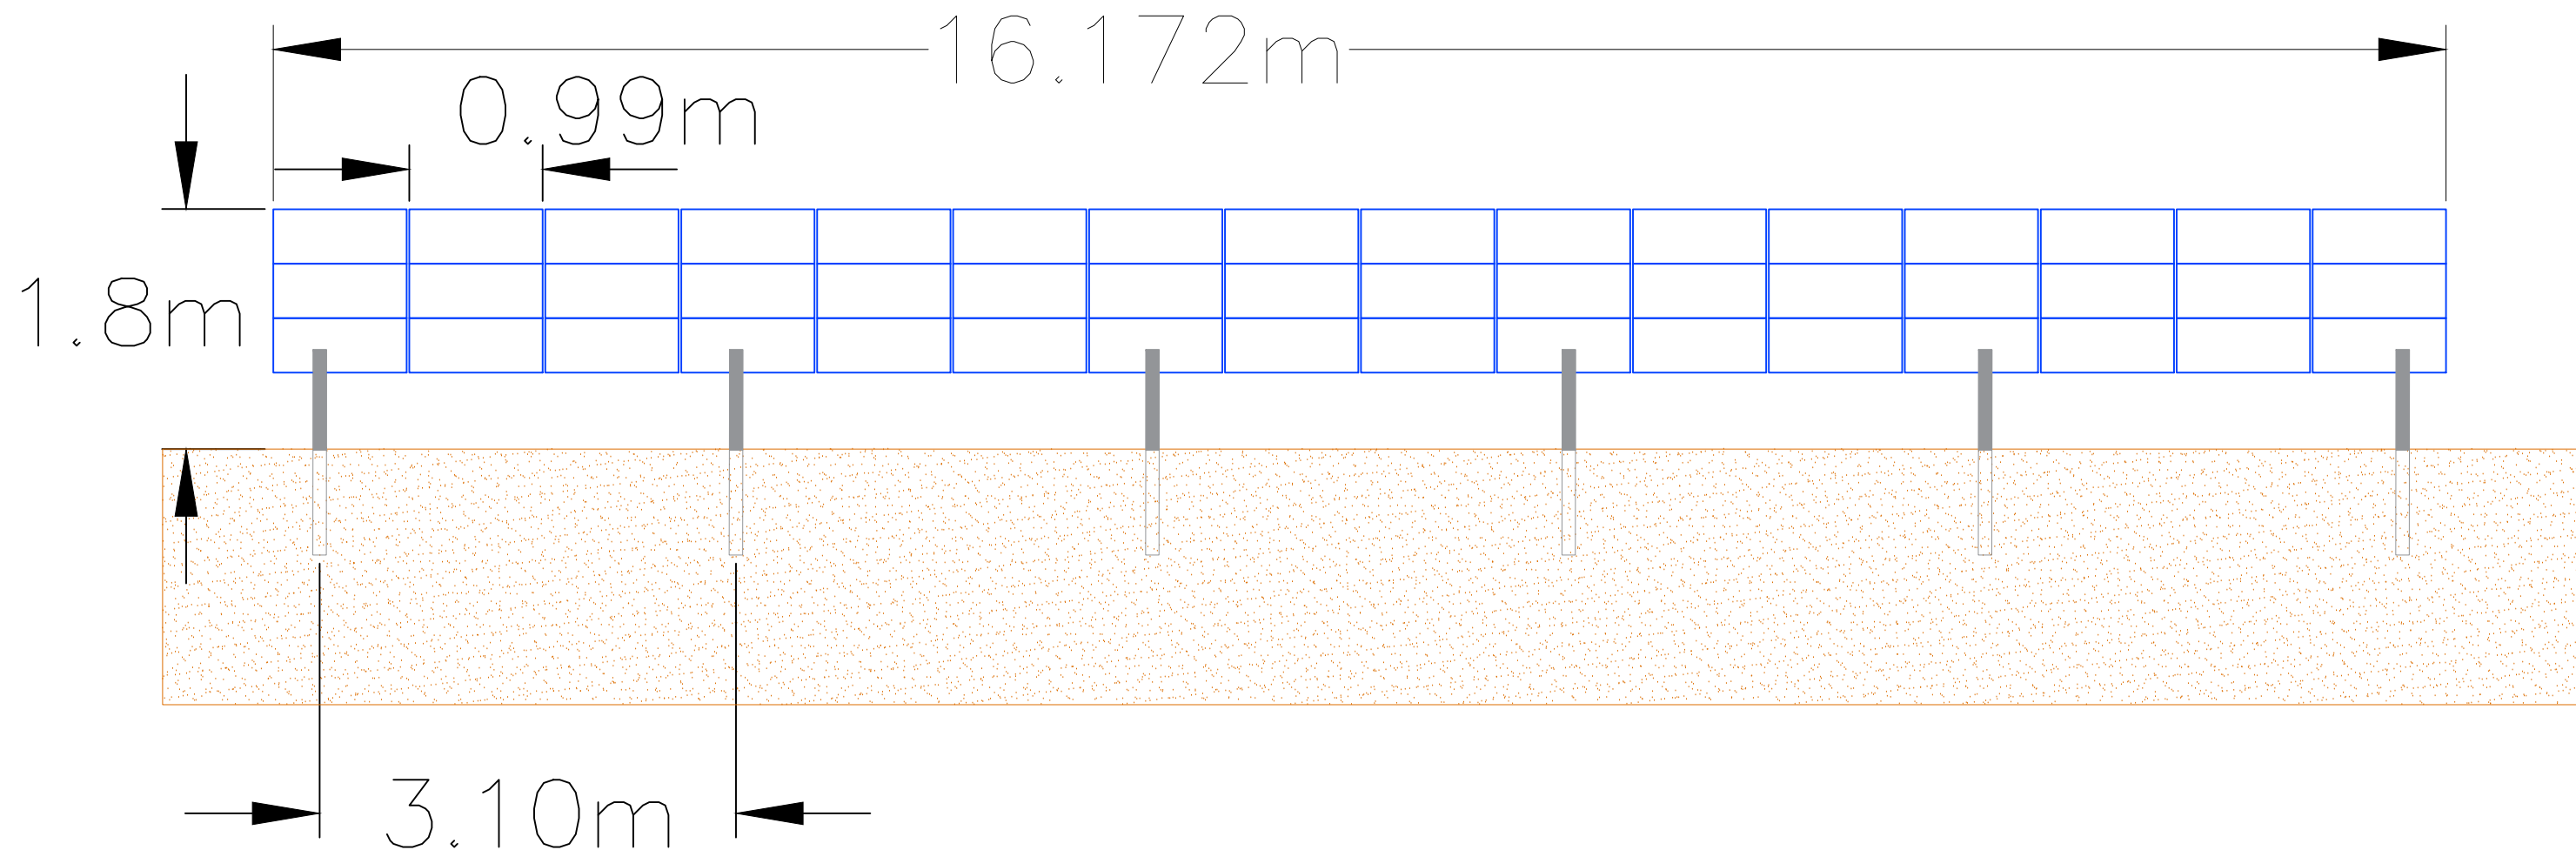

Algemeen aannemer:		Address: VARTEC B.V. Krajenhoffstraat 137-A Amsterdam 1018RG The Netherlands Telefoon: 0031(0)638342809 Fax:	
Revisie:	01	Project:	
Schaal:	-	Eenheid: mm	Vlagtwedde
Datum	17.12.2019	Vorbereid door	Tekening:
trekken	herzien		Frames